

VIP-801 NETWORKED PAGE ZONE EXTENDER

INTRODUCTION

The VIP-801 Networked Page Zone Extender enables voice access to a single zone of one-way paging over an IP-based LAN/WAN. This allows page zone extension anywhere on the network.



SPECIFICATIONS

Features

- 1 Audio Input
- 1 Audio Output
- 2 Form C Relays
- 1 Contact Closure Input
- RJ-45 for network connection
- Front panel activity LED
- Provides audio for up to 150 Valcom one-way amplified speaker assemblies
- AUX audio input via RCA jack
- Contact closure or VOX operation of audio input
- Removable screw terminal connectors provided for audio and relay interface
- Page with music output, music mutes during page
- Output control contact closure provided during paging output
- Compatible with 25 or 70 Volt amplifiers
- 2.5mm jack for DC power
- Power over Ethernet 802.3af Compliant

Dimensions/Weight

- 1.38 H x 6.13" W x 5.25" D
(3.50cm H x 15.6cm W x 13.33cm D)
- Weight: 1.25 lbs. (0.57 kg)

Nominal Specifications

Input Impedance: 600 Ohms
 Input Level: -10dBm nominal
 Voice Switch Sensitivity: -21dBm
 Music Source Input Impedance: 8 to 600 Ohms
 Music Input Level: -10dBm nominal
 Output Impedance: 50 Ohms
 Output Level: - 10dBm nominal
 Relay Current: 1 Amp @ 24VDC

Nominal Power Requirements

Via rear panel barrel connector:

Voltage: 24VDC
 Current: 325mA

Via 802.3af PoE Ethernet Switch:

802.3af: Class 3

Environment

Temperature: 0 to +40° C
 Humidity: 0 to 85% non-precipitating

Packing List

Qty	Item
1	VIP-801
1	VIP Setup CD
1	VSP Document
2	Mounting Brackets
4	Rubber Feet
6	Wood Screws
1	RJ-45 Patch Cable


INSTALLATION

FCC Information

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area

may cause harmful interference in which case the user will be required to correct the interference at his own expense.

Precautionary Designations

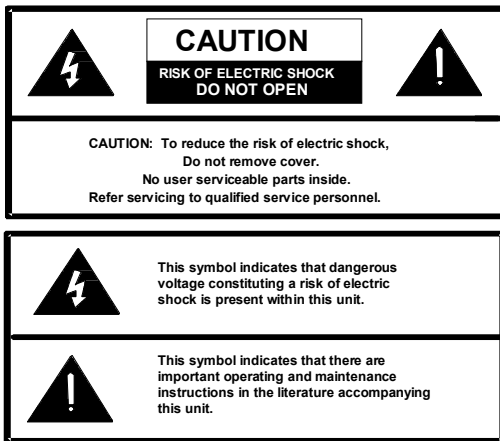

Mounting

The VIP-801 is designed for wall or table mounting.

Table: Provided with the VIP-801 are four rubber stick on feet. Peel these feet off their carrier backing and place at the four corners of the bottom of the unit.

Wall: Using the template and instructions provided, secure the VIP-801 to the wall.

Power Connections

The preferred method of powering a VIP-801 is via a power over Ethernet switch meeting the 802.3af specification.

If the rear panel barrel connector is used for power, the preferred power supply is a Valcom VIP-324.

Make all required signal connections before applying power to the unit. If powering via 802.3af, make sure all signal connections via the back panel are made then connect the VIP-801 to the Ethernet switch.

If power is supplied via the barrel connector, make sure all signal connections are secure. Attach the unit to the network via the front panel RJ-45 Ethernet connector. Apply power by plugging the power supply into the VIP-801 via the barrel connector on the rear of the VIP-801.

Network Connection

The VIP-801 has one CAT-5 RJ-45 network connector on the front panel.

Use one of the supplied CAT-5 patch cables to connect the VIP-801 to an Ethernet switch. If the Ethernet switch is 802.3af compliant the VIP-801 will draw power from it.

Signal Connections

The VIP-801 has 4 I/O connectors on the rear panel:


- RCA jack for AUX audio input
- 2 Pin screw terminal for audio output
- 6 Pin screw terminal for relay connections
- 4 Pin screw terminal for audio input and contact closure input

AUX Input: Local audio input is via the rear panel RCA jack. Nominal input impedance is 600 Ohms. Connect any compatible audio source using an RCA patch cable.

Audio Channels: Access to the networked audio is via screw terminals on the rear panel.

The audio input and contact closure input share a four pin screw terminal connection. Neither input is polarity sensitive. The contact closure is on the right two terminals and is labeled "CC".

Relay Channels: Access the two form C relays is provided via a six pin screw terminal block. The relays are labeled K1 and K2. Each relay is brought out on three terminals. The common contact is the middle terminal with the normally closed contact on the left and the normally open contact on the right. Relay contacts are rated for 1A @ 24VDC.

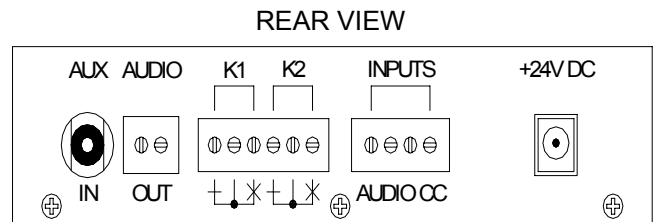

Status Indicator Lights


The VIP-801 has 3 status indication lights on the front panel:

STATUS: Flashes to indicate power.

LINK: Indicates 100 Mbit Ethernet connection when illuminates. No activity indicates 10 Mbit connection.

ACT: Indicator flashes to indicate network activity.

FRONT VIEW

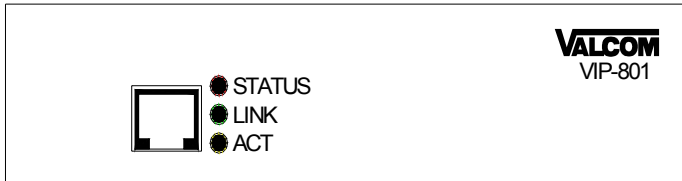

TECHNICAL ASSISTANCE

When trouble is reported, verify power is being supplied to the unit and there are no broken connections. Check voltages for proper polarity to the one-way amplified speakers. If a spare unit is available, substitute a spare unit for the suspected defective unit.

Assistance in troubleshooting is available from the factory. Call (540) 563-2000 and press 1 for Technical Support or via email at support@valcom.com.

When requesting assistance, you should include all available information. It is strongly suggested that you go to the web site and follow the trouble resolution procedure at <http://voip.valcom.com>.

Valcom equipment is not field repairable. Valcom, Inc. maintains service facilities in Roanoke, VA. Should repairs be necessary, attach a tag to the unit clearly stating your company name, address, phone number, contact person and the nature of the problem. Send the unit to:

Valcom, Inc.
Repair & Return Dept.
5614 Hollins Road
Roanoke, Va. 24019-5056

VALCOM LIMITED WARRANTY

Valcom, Inc. warrants its products only to the original purchaser, for its own use, to be free from defects in materials and workmanship under conditions of normal use and service for a period of one year from the date of shipment. This Limited Warranty obligation shall be limited to the replacement, repair or refund of any such defective device within the warranty period, provided that:

1. inspection by Valcom, Inc. indicates the validity of the claim;
2. the defect is not the result of damage, misuse or negligence after the original shipment;
3. the product has not been altered in any way or repaired by others and that factory sealed units are unopened (a service charge plus parts and labor will be applied to units defaced or physically damaged);
4. freight charges for the return of products to Valcom are prepaid;
5. all units 'out of warranty' are subject to a service charge. The service charge will cover minor repairs (major repairs will be subject to additional charges for parts and labor).

This Limited Warranty is in lieu of and excludes all other warranties, expressed or implied and in no event shall Valcom, Inc. be liable for any anticipated profits, consequential damages, loss of time or other losses incurred by the buyer in connection with the purchase, operation, maintenance, installation, removal or use of the product. The maximum liability of Valcom under this warranty is limited to the purchase price of the specific Product covered by the warranty.

Disclaimer. Except for the Limited Warranty provided herein, the product is provided "as-is" without any warranty of any kind whatsoever including, without limitation, any **WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.**

This warranty specifically excludes damage incurred in shipment. In the event a product is received in damaged condition, the carrier should be notified immediately. Claims for such damage should be filed with the carrier involved in accordance with the F.O.B. point.

Headquarters:
Valcom, Inc.
5614 Hollins Road Roanoke, VA 24019-5056
Phone: (540) 563-2000 FAX: (540) 362-9800